




MULTI GRAIN SORTER  
**TRENDZ T20**  
ENDLESS PURITY OF YOUR PRODUCT

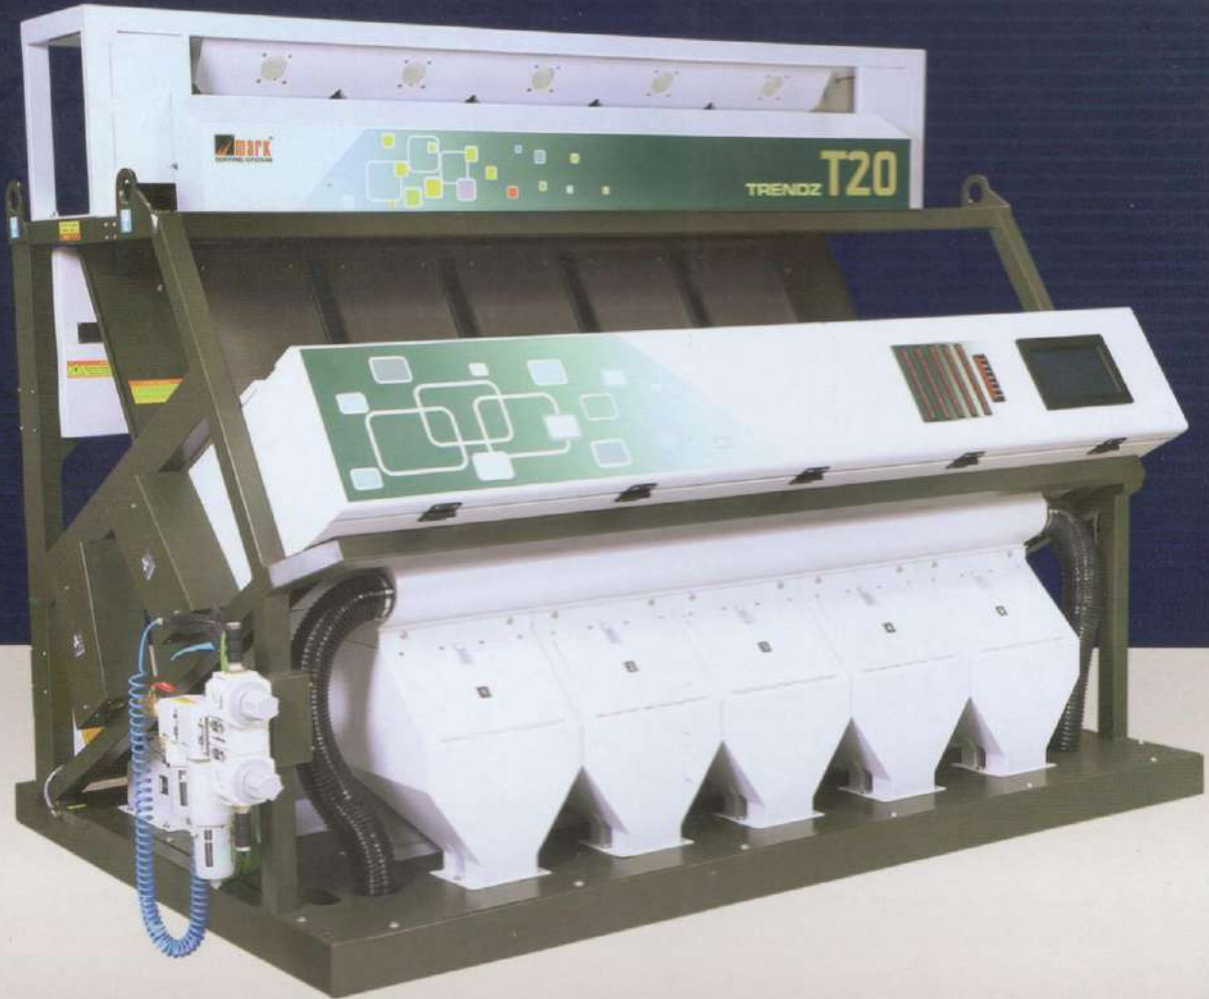

## Product Feature

Mark color sorter is designed to provide a superior performance and reliability, allowing you to avoid annoying maintenance which would effect your production. Mark color sorter is a complete system that incorporates advanced engineering concepts.

Here we proudly introduce the most advanced color sorting machine from mark sorter mainly focused on rice, dall, wheat, pulses, seeds, spices, nuts & plastic sectors as Trendz-T20 which have the following features.

### T20 Camera Specifications

- › Trichromatic CCD color linear image sensor
- › Resolution: 5400x3 Lines pixels with Trichromatic (Red, Green, Blue) color spectrums
- › Equipped with High-Speed data acquisition unit using FPGAs
- › Mainly programmed with image signals for food processing industries (Multigrain Color Sorter)
- › Pre-programmed I/Os with adjustable delay time and on/off time to actuate pneumatic valves
- › It provides adjustable gain and exposure
- › Highly specialized ultra-wide lens for sorting purpose only
- › Both front view and back view cameras are digitally aligned with digital alignment technology
- › Factory calibrated sensor with uniform lightings or illuminations
- › Image signals are processed to attain accurate RGB color spectrums with precise intensity



RGB Trichromatic Color Camera



Chute

Chute Option Available	12 Chute	10 Chute	8 Chute	7 Chute	6 Chute
Chute Distribution (P+S+F)	7+3+2 (or) 7+2+2+1	6+2+2 (or) 6+2+1+1	5+2+1 (or) 4+2+1+1	4+2+1 (or) 4+2+(4+2+1)	4+1+1 (or) 4+1+(4+2+1)
Output (TPH) for Rice/Dal	7 to 9	6 to 8	5 to 7	4 to 6	3.5 to 5.5
No. of Camera (F&R)	12+12	10+10	8+8	7+7	6+6
Air Requirement@7.5kg/cm <sup>2</sup>	230 CFM	180 CFM	150 CFM	132 CFM	113 CFM
Compressor Requirement	50HP Screw	40HP Screw	30 to 40 HP Screw	30HP Screw	25HP Screw
Dimension (LxWxH) Feet	16x4.88x5.97	13.83x4.88x5.97	10.87x4.88x5.97	9.73x4.88x5.97	8.59x4.88x5.97
Cabin Dimension (LxWxH) Feet	20x10x8	18x10x8	16x10x8	14x10x8	13x10x8

Note 1: Output load and rejection will be vary depend upon input materials contamination and dust  
2: 2% Contamination



### 10' Inch Color HMI

- › Mini computer based touch screen
- › Uncountable storage capacity for saving different program modes
- › User interfaced touchscreen with live communication technology
- › Inbuilt processor with 1GHz speed



Touch Screen

### User Defined Background With Color Led

- › Low energy consumption led lighting
- › Improves fine RGB illumination in background
- › Enhancing defects recognition systems by varying different backgrounds for different types of grains



Color Reflector LED

### High Speed Pneumatic Ejectors

- › Precision sorting of grains with high speed of 1ms on/off time
- › Ultra drive high frequency solenoid valve
- › Long operating life (half a billion cycles)

### Simultaneous Re-Sorting

- › Maximizes recovery of good product having highest reject concentration

### Chute

- › Used for flow of all types of grains in one chute can have optional heatpad and acrylic sheet attachments
- › 63 Channels per chute



Matrix Ejector

5 Chute	4 Chute	3 Chute	2 Chute	1 Chute	1 Chute 32 Channels
3+1+1 (or) 3+1+(40+21)	2+1+1 (or) 2+1+(40+21)	2+1 (or) 2+(40+21)	1+1 (or) 1+(40+21)	1	1
3 to 5	2 to 4	1.5 to 2.5	1 to 2	0.75 to 1.5	0.500 to 1.0
5+5	4+4	3+3	2+2	1+1	1+1
96 CFM	72 CFM	54 CFM	38 CFM	28 CFM	15 CFM
25HP Screw	20HP Screw	15HP Screw	10HP Screw	7.5HP Screw	5HP Screw
7.46x4.88x5.97	6.33x4.88x5.97	5.19x4.88x5.97	4.1x4.88x5.97	2.92x4.88x5.97	1.94x4.16x4.76
12x10x8	10x10x8	9x10x8	8x10x8	7x10x8	Movable type with wheel





32 CHANNELS




TRENDZ T20  
BELT COLOR SORTER



Model	Size LXWXH (mm)	Product Output (T/H)	Compressor Requirement
Trendz -T20 - Belt Type - 600mm	3657x1360x1691	0.5 to 1.0	10 Hp to 15 HP

Commodity : Garlic, Full Cashew, Plastic, Badam, Walnuts, Chilli Etc.. Non Standard Other Items


# Compressor To Machine

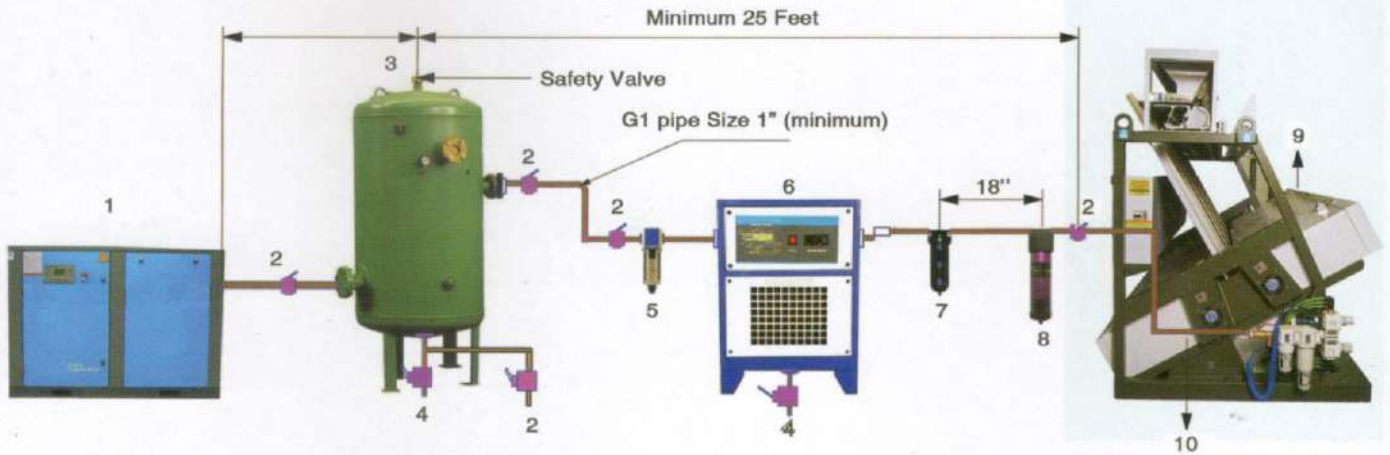


1. Screw compressor
2. Control valve (manual drain valve)
3. Air receiver tank
4. Auto drain valve timer
5. Pre filter 5.0 micron
6. Air drier
7. After filter 1.0 micron
8. Special micro filter for oil removal 0.001 micron
9. Mark Sorting Machine
10. Dry air only allow (dont allow oil & water parts inside the pipeline)

Option-1

Option-2

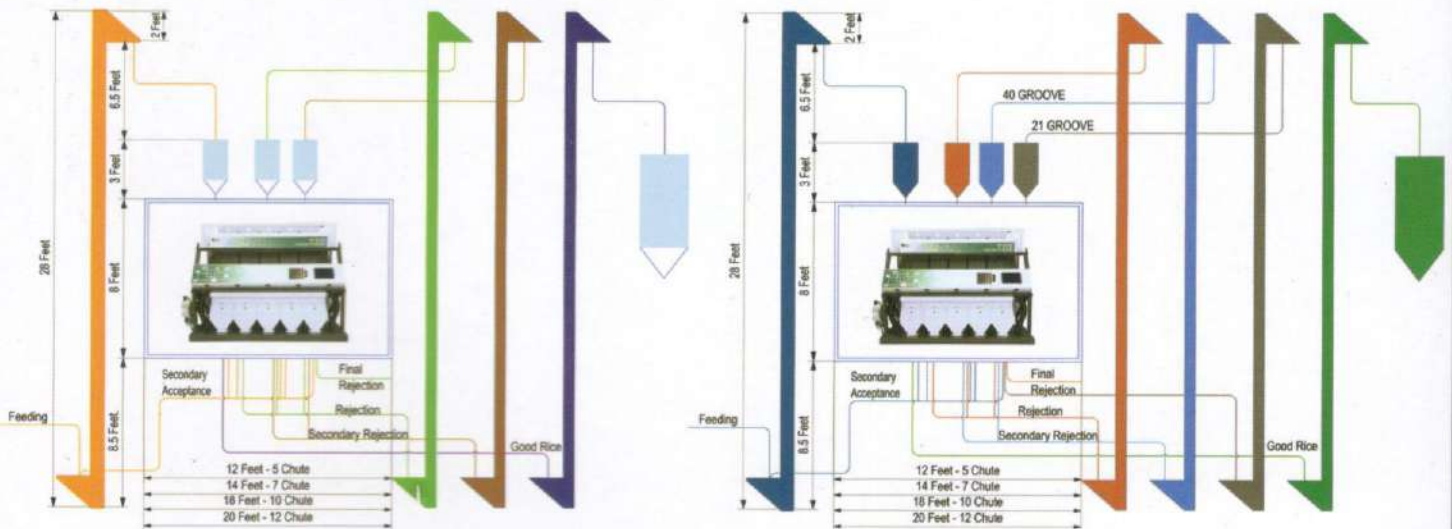

Note: Some special case the last chute can divided 40+21, will need the 5th elevator

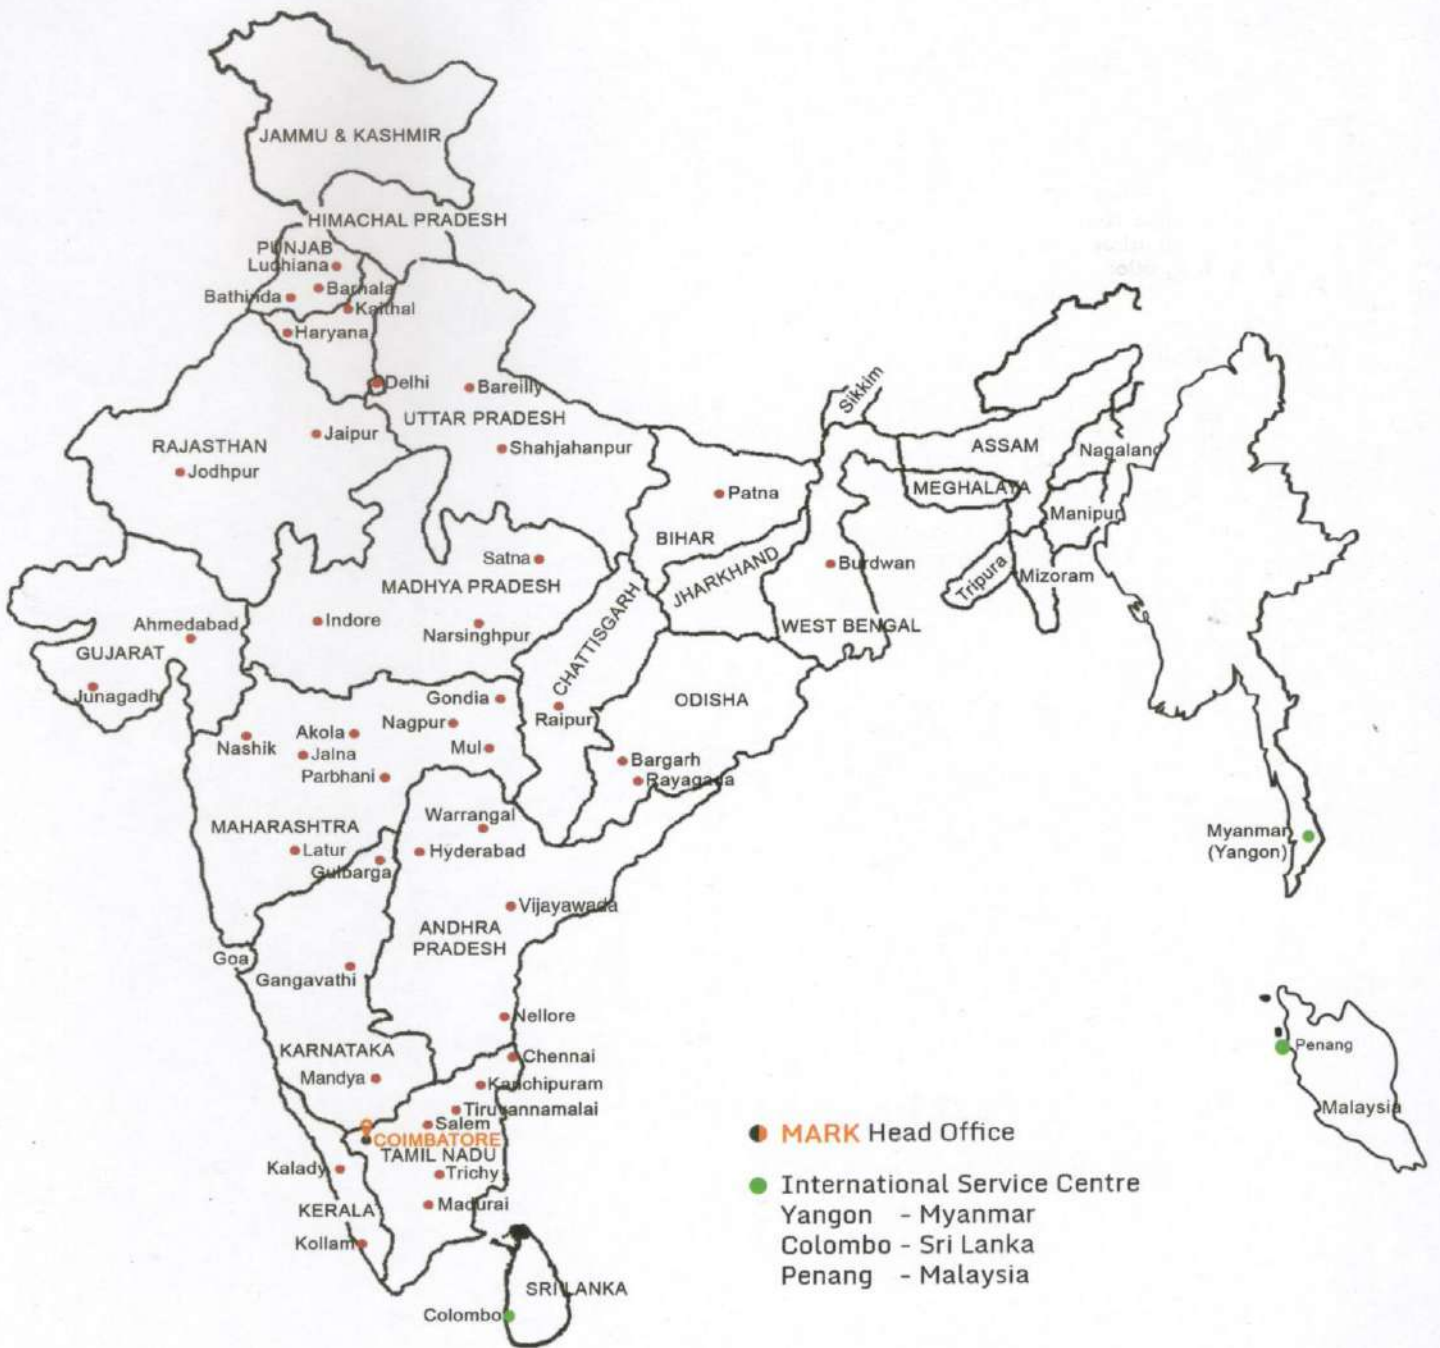

- MARK Head Office
- International Service Centre  
 Yangon - Myanmar  
 Colombo - Sri Lanka  
 Penang - Malaysia



Company Reg.: 2014/122462/07

**Mahen Singh**  
 Managing Director

☎ +27 72 445 6442  
 ✉ mahen.singh@globalohlcommodity.com  
 🌐 www.globalohlcommodity.com

Overhead Line Hardware | Metals & Mineral Resources  
 Agricultural Commodities